


Tadano GR-300EX

Nostoteho **30 t**
Nostosäde **37 m**
Nostokorkeus **45 m**

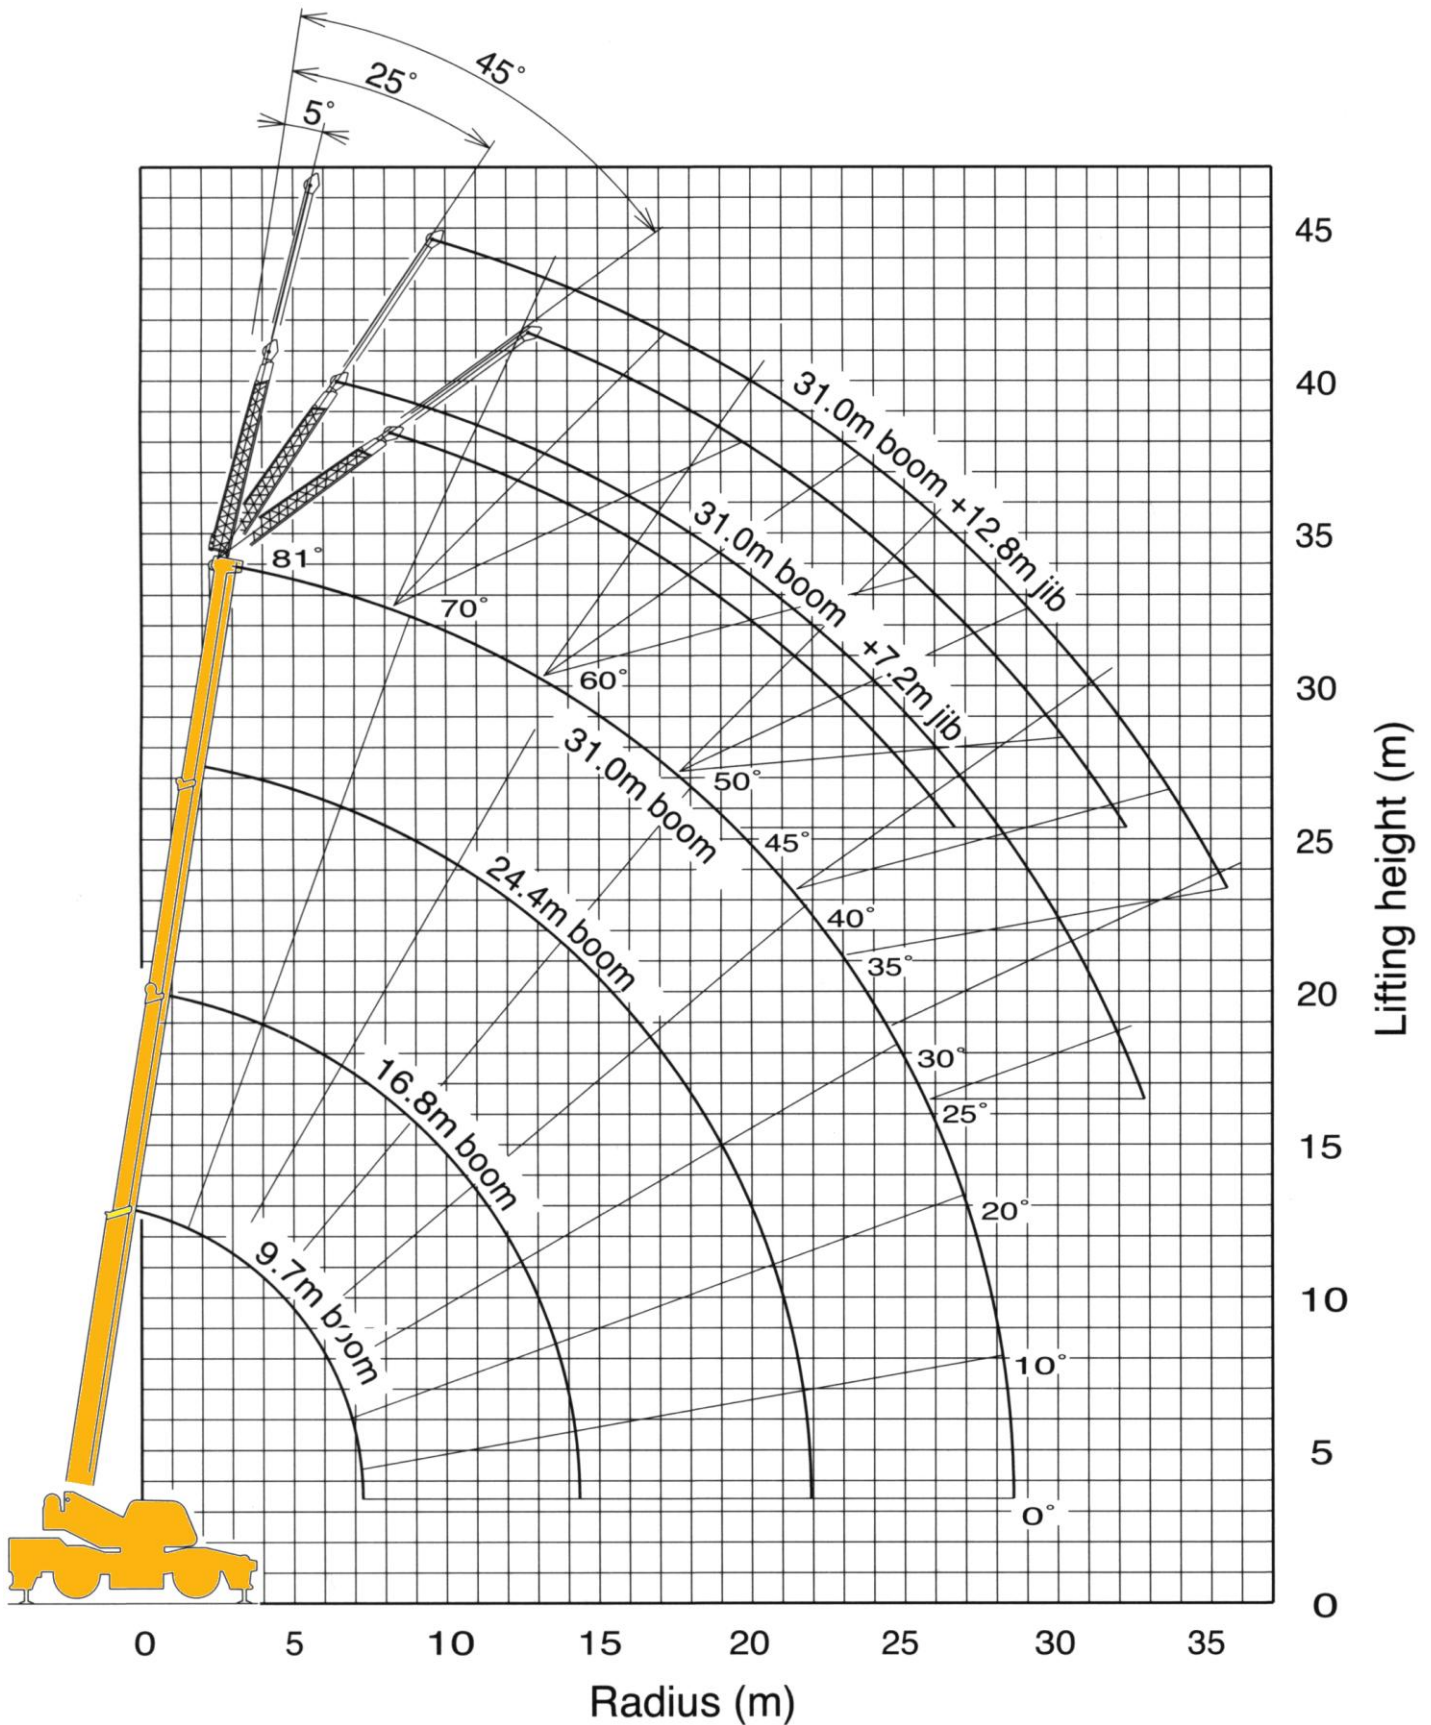

Tukijalat täysin ulkona 360° (hydraulipuomi)

	9.7m	16.8m	24.0m	31.0m
3,0	30,000	19,200	12,500	
3.5	27,200	19,200	12,500	
4.0	23,400	19,200	12,500	8,400
4.5	21,300	18,300	12,500	8,400
5.0	19,600	17,000	12,500	8,400
5.5	18,100	15,800	12,500	8,400
6.0	16,600	14,700	12,500	8,400
6.5	15,200	13,600	11,700	8,400
7.0	14,100	12,900	11,000	8,100
8.0		10,900	9,750	7,500
9.0		9,000	8,750	6,800
10.0		7,050	7,900	6,200
11.0		5,800	6,600	5,800
12.0		4,050	5,600	5,400
13.0		3,400	4,750	5,000
14.0			4,150	4,400
15.0			3,600	3,850
16.0			3,200	3,450
17.0			2,750	3,050
18.0			2,450	2,650
19.0			2,050	2,400
20.0			1,800	2,100
22.0				1,700
24.0				1,300
26.0				1,000
28,0				0,500

Tukijalat täysin ulkona 360° (ristikko)

31.0m Boom + 7.2m Jib					
Ristikko 5°		Ristikko 25°		Ristikko 45°	
Säde	Kg	Säde	Kg	Säde	Kg
5,9	3,500	8,1	2,400	9,8	1,700
7,7	3,500	9,8	2,300	11,4	1,650
9,4	3,500	11,4	2,200	12,9	1,600
11,2	3,230	13,0	2,100	14,4	1,550
12,7	2,950	14,6	2,000	15,8	1,500
14,3	2,750	16,1	1,930	17,2	1,450
15,8	2,550	17,5	1,850	18,6	1,400
17,3	2,350	19,0	1,800	19,9	1,380
18,7	2,150	20,4	1,750	21,2	1,350
20,0	1,950	21,6	1,650	22,4	1,330
21,4	1,750	22,9	1,550	23,6	1,300
22,6	1,550	24,0	1,380	24,7	1,230
23,9	1,350	25,2	1,200	25,7	1,150
25,0	1,180	26,3	1,100	26,7	1,100
26,0	1,000	27,3	1,000	27,7	1,000
27,1	900	28,2	900		
28,1	800	29,1	800		
29,0	700	30,0	700		
30,0	600	30,8	600		
30,8	530	31,5	530		
31,6	450	32,2	450		
32,3	400	32,8	380		
33,0	350	33,4	300		

Ilman tukijalkoja (hydraulipuomi)

	Edestä (+ - 2°)			Ympäriarvot (360°)		
	9,7m	16,8m	24,4m	9,7m	16,8m	24,4m
3,0	18,000			11,000		
3,5	17,000			9,000		
4,0	15,000			7,300		
4,5	12,700	11,000		5,700	5,500	
5,0	10,600	9,500		4,900	4,500	
5,5	9,000	8,000		4,000	3,700	
6,0	7,700	7,000		3,200	3,100	
6,5	6,600	6,100		2,750	2,500	
7,0	5,700	5,300		2,270	2,100	
8,0		4,250	5,000		1,400	2,200
9,0		3,450	3,900		850	1,600
10,0		2,650	3,150			1,100
11,0		2,100	2,550			800
12,0		1,600	2,100			
13,0		1,200	1,750			
14,0		750	1,400			
15,0			1,100			
16,0			850			
17,0			600			

Tukijalat täysin ulkona 360° (ristikko)

31.0m Boom + 12.8m Jib					
Ristikko 5°		Ristikko 25°		Ristikko 45°	
Säde	Kg	Säde	Kg	Säde	Kg
7,7	2,200	11,7	1,200	14,6	800
9,8	2,150	13,5	1,150	16,3	780
11,8	2,100	15,3	1,100	17,9	750
13,6	1,930	17,1	1,050	19,4	730
15,5	1,750	18,8	1,000	21,0	700
17,2	1,630	20,5	950	22,5	680
18,9	1,500	22,0	900	23,9	650
20,6	1,400	23,6	880	25,2	650
22,3	1,300	25,1	850	26,6	650
23,8	1,230	26,4	800	27,8	650
25,4	1,150	27,9	750	29,0	650
26,8	1,100	29,2	730	30,2	630
28,3	1,050	30,5	700	31,4	600
29,6	900	31,7	680	32,5	600
30,8	750	32,8	650	33,5	600
32,0	680	33,8	600		
33,1	600	34,8	550		
34,2	530	35,7	480		
35,2	450	36,5	400		
36,1	400				
37,0	350				

